


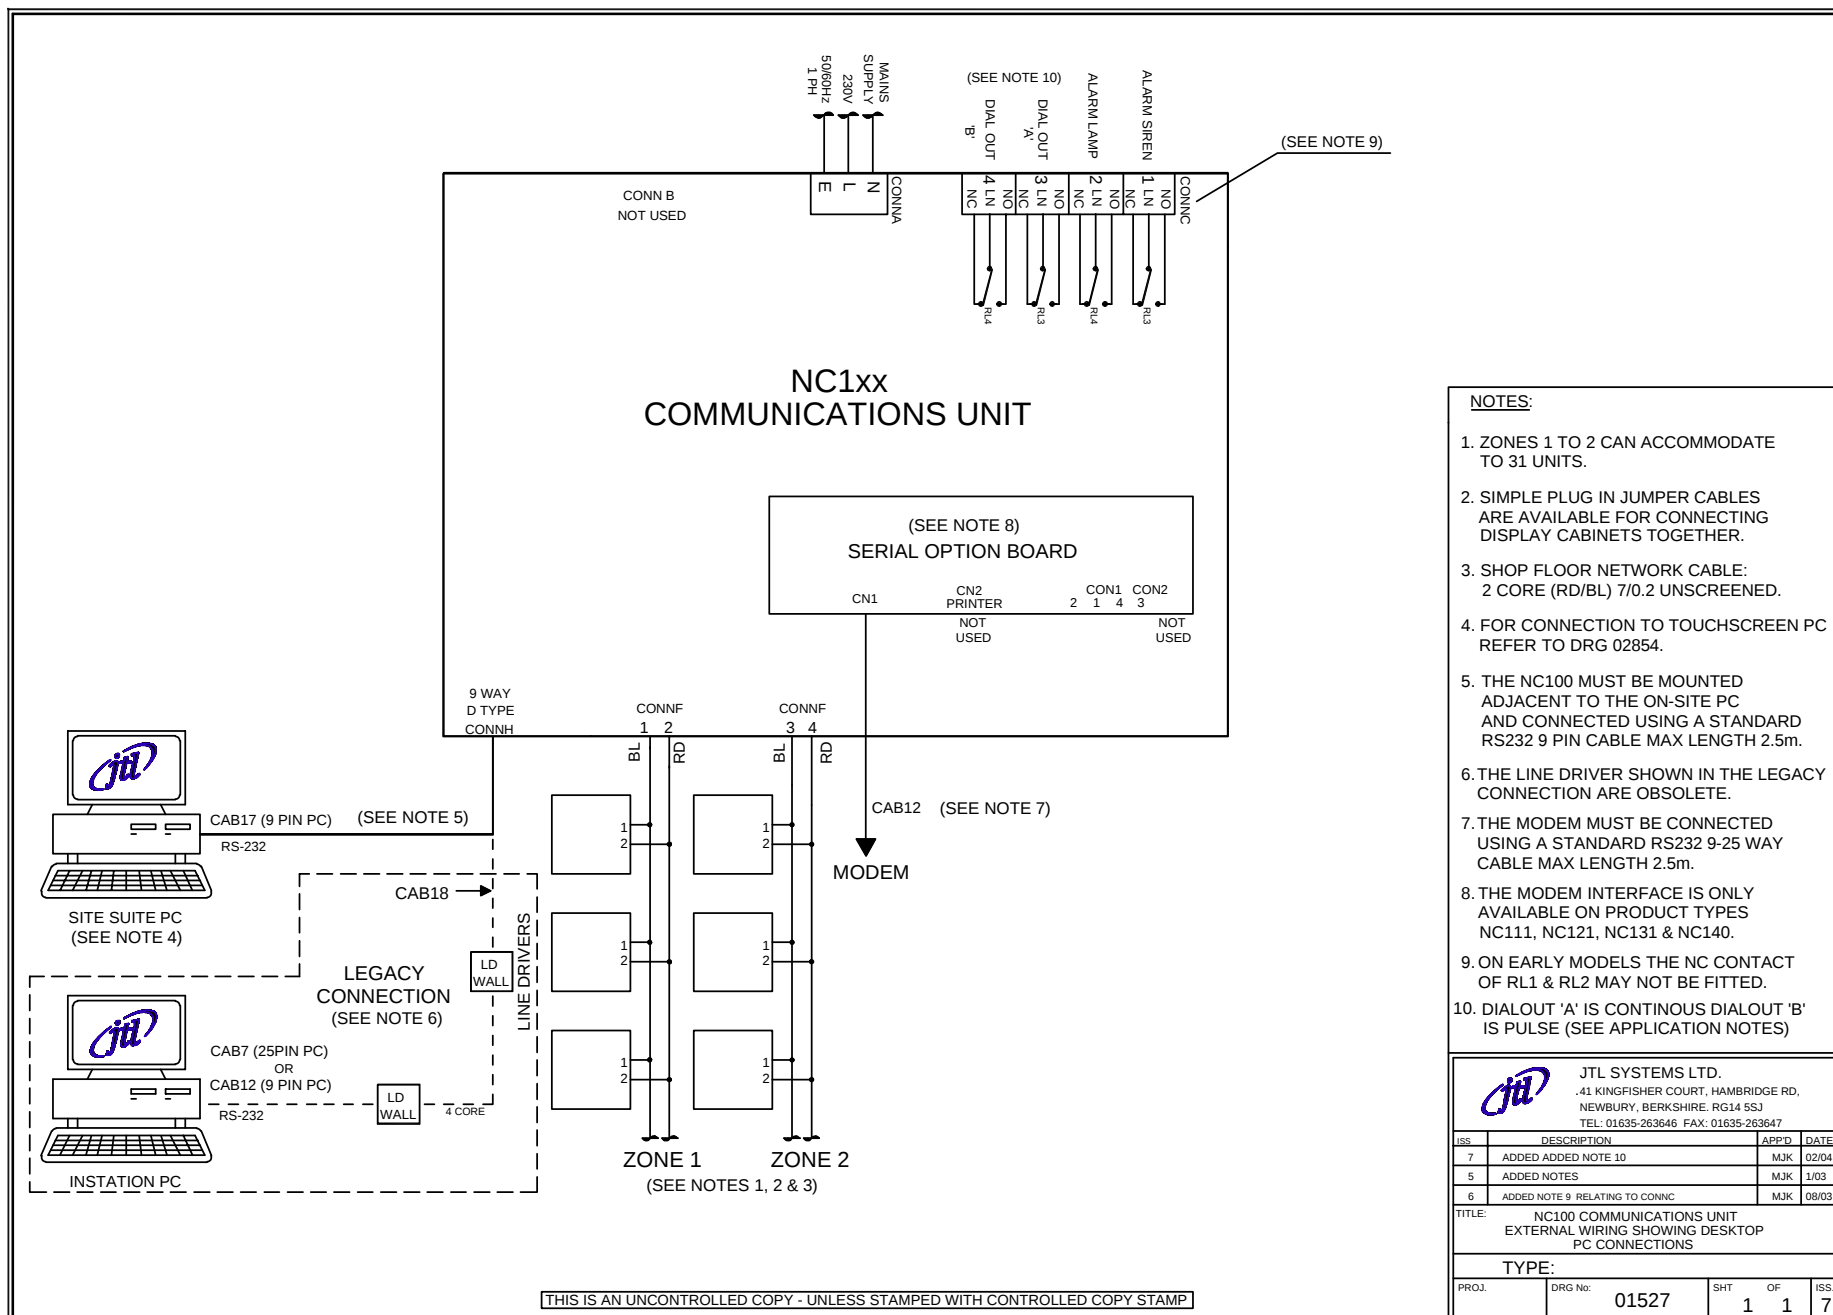

- NOTES:**
1. ZONES 1 TO 2 CAN ACCOMMODATE TO 31 UNITS.
 2. SIMPLE PLUG IN JUMPER CABLES ARE AVAILABLE FOR CONNECTING DISPLAY CABINETS TOGETHER.
 3. SHOP FLOOR NETWORK CABLE: 2 CORE (RD/BL) 7/0.2 UNSCREENED.
 4. FOR CONNECTION TO TOUCHSCREEN PC REFER TO DRG 02854.
 5. THE NC100 MUST BE MOUNTED ADJACENT TO THE ON-SITE PC AND CONNECTED USING A STANDARD RS232 9 PIN CABLE MAX LENGTH 2.5m.
 6. THE LINE DRIVER SHOWN IN THE LEGACY CONNECTION ARE OBSOLETE.
 7. THE MODEM MUST BE CONNECTED USING A STANDARD RS232 9-25 WAY CABLE MAX LENGTH 2.5m.
 8. THE MODEM INTERFACE IS ONLY AVAILABLE ON PRODUCT TYPES NC111, NC121, NC131 & NC140.
 9. ON EARLY MODELS THE NC CONTACT OF RL1 & RL2 MAY NOT BE FITTED.
 10. DIALOUT 'A' IS CONTINUOUS DIALOUT 'B' IS PULSE (SEE APPLICATION NOTES)

JTL SYSTEMS LTD. .41 KINGFISHER COURT, HAMBRIDGE RD, NEWBURY, BERKSHIRE. RG14 5SJ TEL: 01635-263646 FAX: 01635-263647			
ISS	DESCRIPTION	APP'D	DATE
7	ADDED NOTE 10	MJK	02/04
5	ADDED NOTES	MJK	1/03
6	ADDED NOTE 9 RELATING TO CONNC	MJK	08/03
TITLE: NC100 COMMUNICATIONS UNIT EXTERNAL WIRING SHOWING DESKTOP PC CONNECTIONS			
TYPE:			
PROJ	DRG No: 01527	SHT OF	ISS
		1 1	7