




MONITORING SYSTEMS PA510 Plant Alarm Monitor



For on site and remote monitoring of up to 8 digital inputs.

- Networked product
- Provides alarms for up to 8 fault inputs
- Suitable for monitoring compressors and condensing units.
- 22 selectable alarms
- 10 sets of alarm types
- Set up parameters maintained for restart
- Independant alarm delays
- Alarm can be on input present or absent
- Choice of critical alarms or non-critical events

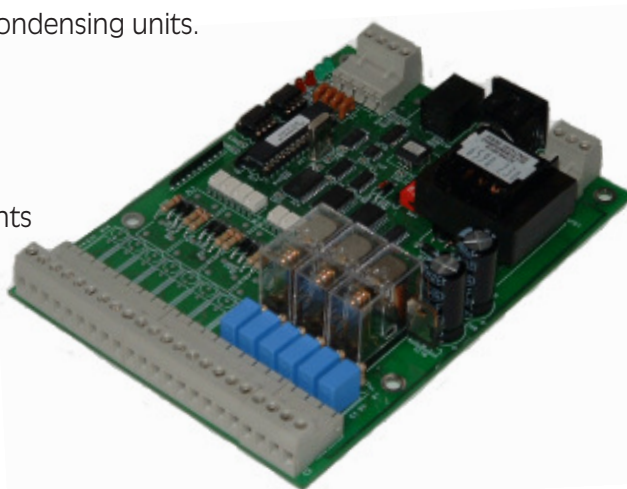

Product Data

Product Features The PA510 monitors/alarms up to 8 digital fault inputs. Each input can be selected from a list of 22 alarms. Each input can have an independant time delay. Inputs can be set to alarm individually for input present or absent. Each input can be set as a critical alarm or non-critical event. Critical alarms can be announced on site and create remote alarm actions to an alarm monitoring centre.

Alarms The PA510 provides alarm information via a JTL Network.

Remote Access If operating within a JTL Network, alarm conditions can be viewed remotely.

Hardware

Optically isolated high voltage inputs 8

Technical Specification

For pre-defined alarm input types, please refer to User Guide (Doc 03475)

Communications port RJ8 connector
 Communications data rate 4800 baud
 Communications protocol JTL Jnet zone protocol

Unit dimensions (L x W x H) 161 x 120 x 35 mm
 Unit weight 0.33 kg

Power supply (standard) 230 V 48-52 Hz
 (Optional) 24 V

Ordering Information

PA510 Complete unit unboxed

Power Supply Options:

For 24 V append -24 to order code



This unit conforms with the relevant EU standards when fitted in accordance with its installation instructions.

Doc No. 03480-PA510.pmd Issue 1 Oct 2008

JTL Systems Limited

Head Office
Technical Support Centre
Monitoring Centre

Newbury
 Newbury
 Sunderland

tel: 44 (0)1635 263646
tel: 44 (0)870 321 8585
tel: 44 (0)870 321 4161